

MODG-100 / MODG-102

Modbus/TCP gateways



MODG-100 and **MODG-102** are a single and dual port Modbus/TCP to Modbus RTU gateways. The MODG-100 features one serial port which can be configured as either RS-232, RS-485 or RS-422 layer. The MODG-102 features two serial ports which can be configured as either RS-232 or RS-485 layer or by combining the two ports as a single RS-422 link. Both gateways have an Ethernet port and can be mounted on a DIN rail.

Usage and configuration of the gateway is simple and conveniently performed using a web browser which connects to the embedded web server.

Possible areas of application are:

- PLC connection
- SCADA integration
- Operator panel interfacing
- Remote control & monitoring
- HMIs
- Data logging


Features

- Modbus/TCP (Ethernet)
- Modbus RTU
- Modbus ASCII
- RS-232, RS-485 or RS-422 layers, software configurable
- Embedded web server for easy configuration and commissioning using a web browser
- Firmware upgradeable via Ethernet

MODG-100




Usage

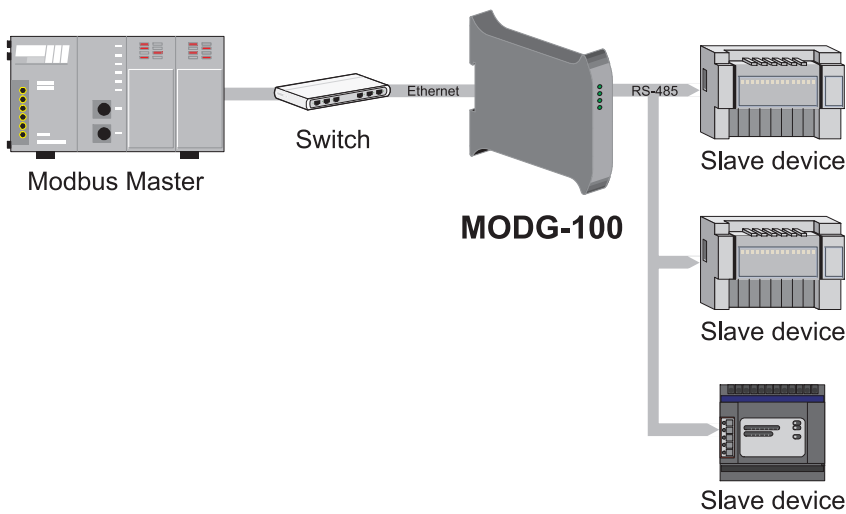


Order Information

Model number	Configuration
MODG-100	Gateway with Ethernet, 1 serial port RS-232, RS-485 or RS-422, DIN rail enclosure
MODG-102	Gateway with Ethernet, 2 serial ports RS-232 or RS-485 or 1 port RS-422, DIN rail enclosure

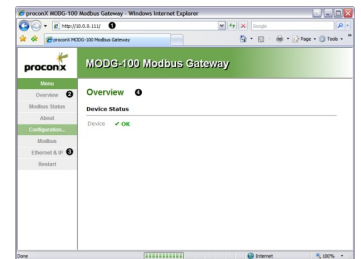

Connections

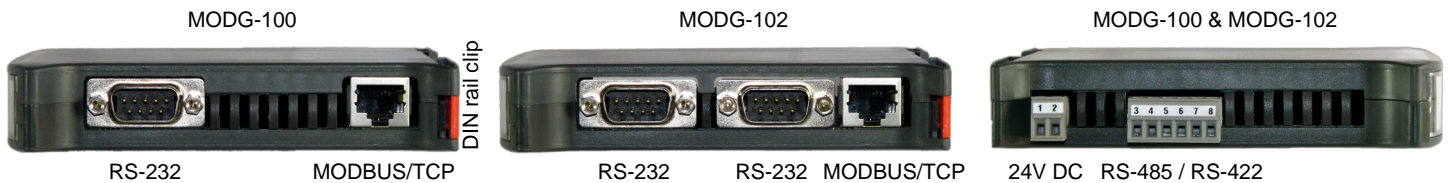

Specifications

MODG-100

- 1 Ethernet
- 1 Serial port: RS-232, RS-485 or RS-422

Serial Port 1

- Modbus RTU
- Modbus ASCII

RS-485/RS-422

- EIA-485-A, 2-wire or 4-wire
- 300-115200 bps
- Up to 32 nodes

RS-232

- EIA-232-F DTE
- DE9M with EIA-574 pinout
- RXD, TXD, RTS, CTS, DTR, DSR, DCD, RI signals
- 300-115200 bps

MODG-102

- 1 Ethernet
- 2 Serial ports: 2 x RS-232 or 2 x RS-485 or 1 x RS-232 + 1 x RS-485 or 1 x RS-422

Serial Port 2

- Modbus RTU
- Modbus ASCII

RS-485

- EIA-485-A, 2-wire
- 300-115200 bps
- Up to 32 nodes

RS-232

- EIA-232-F DTE
- DE9M with EIA-574 pinout
- RXD, TXD signals
- 300-115200 bps

Ethernet port

- Modbus/TCP Slave, 4 (MODG-100) or 8 (MODG-102) concurrent connections
- IP, TCP, HTTP, ARP, TFTP
- IEEE 802.3i 10BASE-T
- 1.5 kV galvanic isolation

User interface

- Power, Ethernet and Communication Status LEDs
- Web browser interface for Monitoring & Configuration

Power requirements

- 10-30 V DC, 750 mW
- 30 mA typical @ 24 V DC

High availability

- Watchdog supervision
- Brown-out detection

Electromagnetic compatibility

- Emissions CISPR 22/EN 55022 (Class A)
- Immunity EN55024
- Electrostatic discharge EN61000-4-2
- Radiated RF EN61000-4-3
- Fast transients EN61000-4-4
- Conducted RF EN61000-4-6

Environment

- 0° to 60 °C / 32 to 140 °F operating
- 25° to 80 °C / -13 to 185 °F storage
- 10 to 95% humidity, non-condensing

Form factor / enclosure

- Self-extinguishing PC/ABS (UL 94-V0)
- 35 mm DIN rail mountable
- IP 20 / NEMA Type 1
- Convection cooling
- 101 x 22.5 x 120 mm / 3.98 x 0.886 x 4.72 in
- 0.12 kg / 0.265 lbs

Compliance

- C-Tick
- CE, RoHS
- FCC Part 15 (Class A)
- ICES-003 (Class A)

proconX Pty Ltd
 Unit 7 / 14 Argon St, Sumner QLD 4074, Australia
 Tel +61-3376 3911 Fax +61-7-3102 9206

www.proconX.com
 mail@proconX.com

proconX
 Professional Fieldbus Connections